



- **Noise Cancelling Dynamic - No power required**
- **Wide frequency resonance and low distortion**
- **UK manufactured**
- **IP67 design**
- **Flexible boom assembly**
- **Flying lead to maximise customer options**

Type: Dynamic, moving coil
 Dimensions: As drawing
 Impedance: 300 Ohms
 Sensitivity: -60 ± 5 dBV for 90Db SPL at 1 KHz
 Freq Response: 200Hz to 10KHz
 Distortion: $< 5\%$ at -20 dBPa
 Terminals: Flying lead

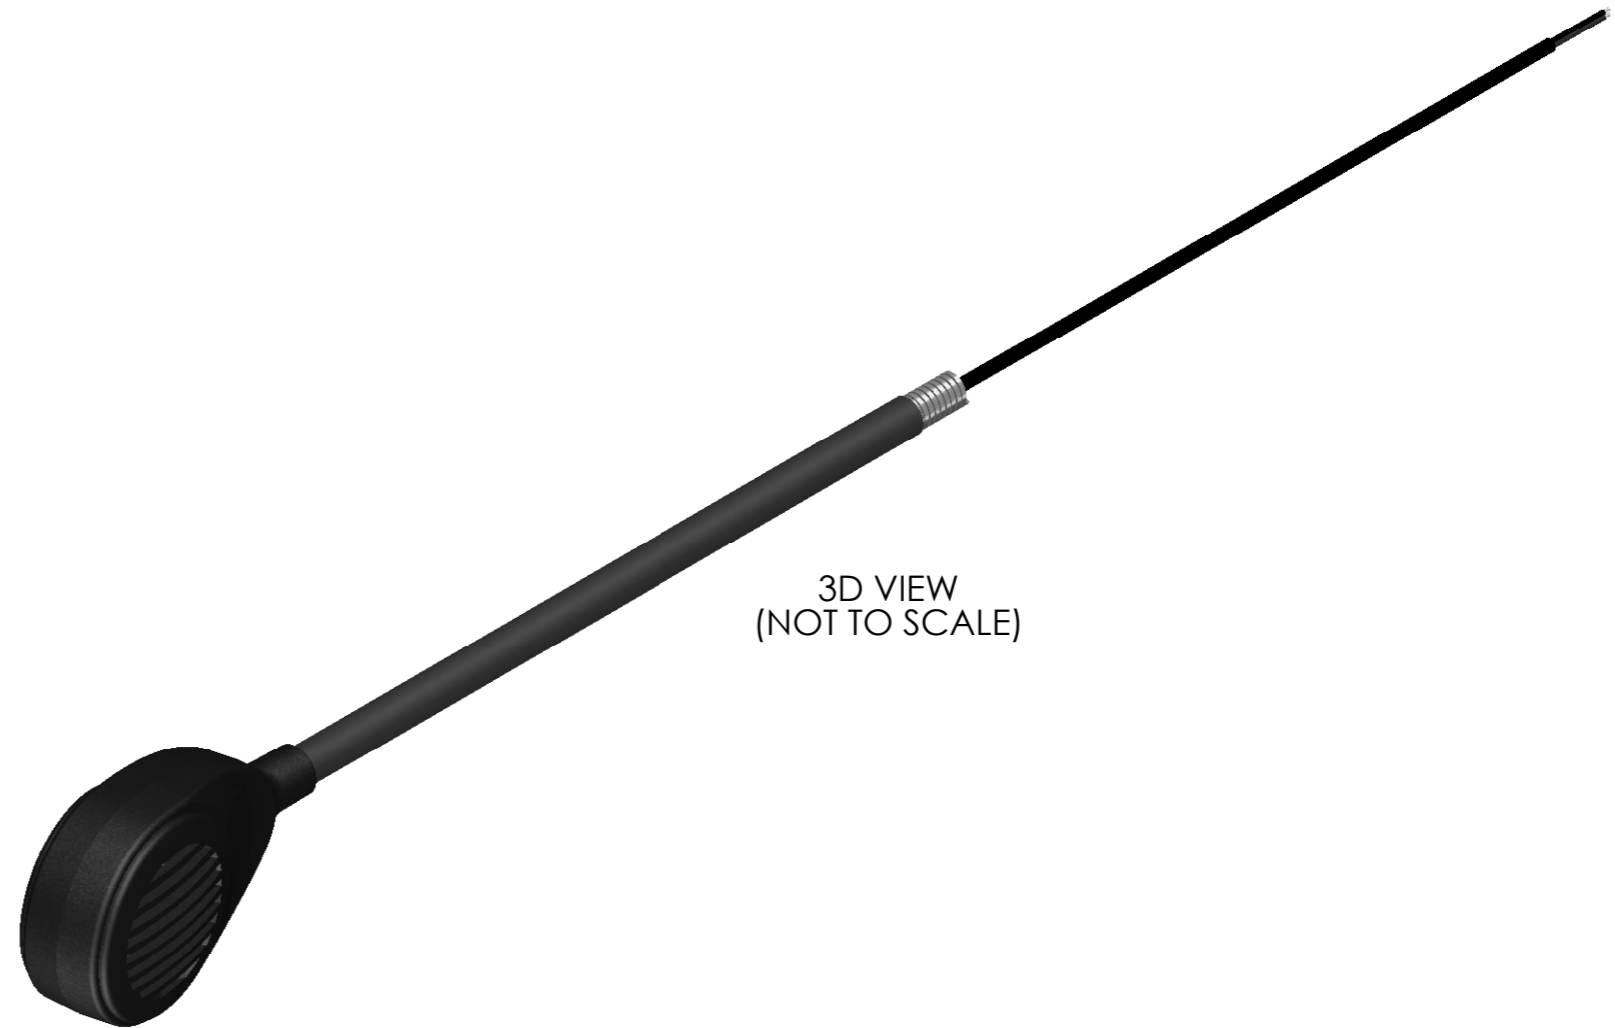

3D VIEW
(NOT TO SCALE)

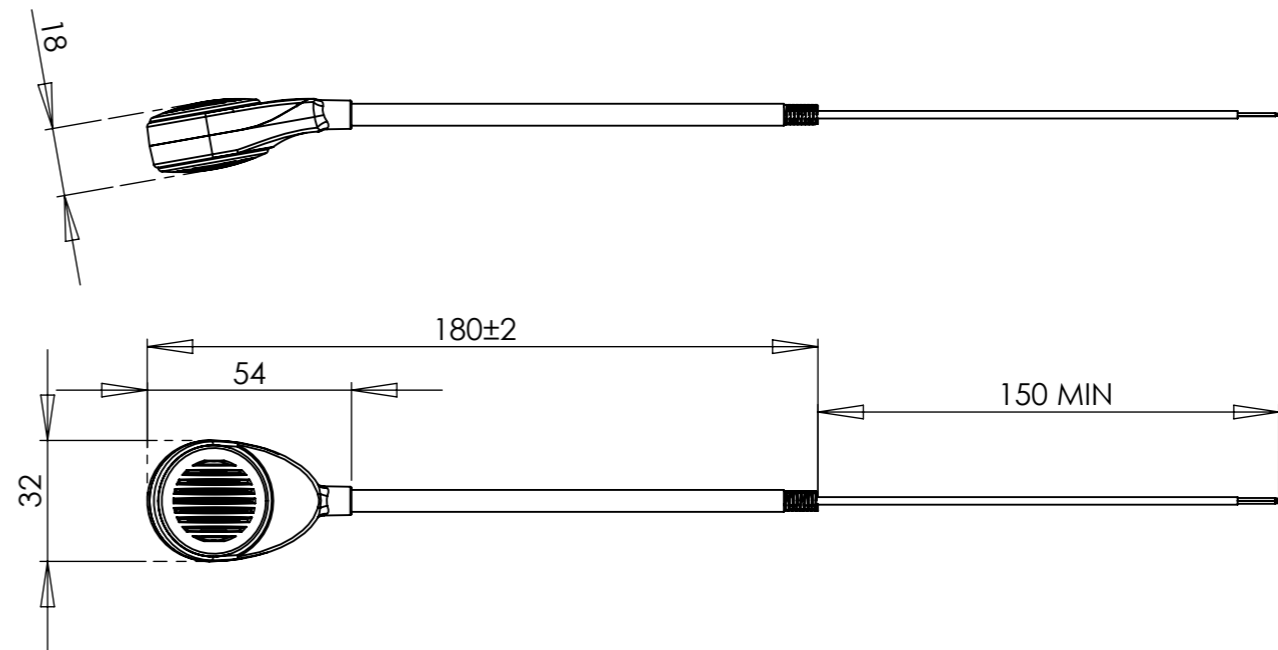

			FOR EXPLANATION OF NOTES, DIMENSIONS ETC SEE BS 8888	MATERIAL	TOLERANCES ANGULAR $\pm 1^\circ$ WHOLE NUMBERS ± 1.0 ONE PLACE DECIMALS ± 0.25 TWO PLACE DECIMALS ± 0.10 UNLESS OTHERWISE STATED	TITLE. U 0 5 2 3 DYNAMIC MICROPHONE
			DRAWN BY RBrooks	FINISH	DIMENSIONS IN mm	DRAWING No. MFC
			CHECKED BY		SCALE 1:2	
A	7-12-11	First Drawn			PAMBRY ELECTRONICS LTD, PAMBRY HOUSE, UNITS 7 & 8, VENTURA PLACE, UPTON IND. ESTATE, POOLE, DORSET BH16 5SW	
ISS.	DATE	MODIFICATION				A3